

# LS3 FLAIL MOWER










Y Blade  $\varnothing$  3 cm

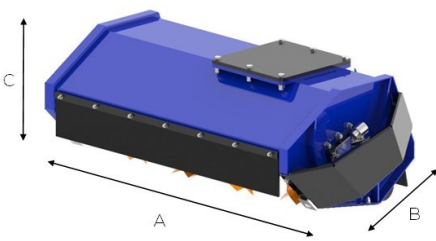

Hammer  $\varnothing$  5 cm

By far our most popular flail, the LS3 is ideal for cutting hedges, brambles, grass and branches up to 5cm in diameter, for those with excavators between 2 to 6 Ton. The LS3 is supplied with protective rubber guard, anti-cavitation/flow control: a system that stops any spike in pressure/sudden stoppage from damaging the excavator/motor, an adjustable rear roller with 3 cutting positions and a choice of either Y or hammer blades. No drain line required.



		TONS	1.5-5	2-5	4-6
	MOD.		LS3 600	LS3 800	LS31000
	ALT.		TTE 70L	TTE 90L	TTE 105L
	A.	MM	950	1150	1300
	B.	MM	550	550	600
	C.	MM	450	450	400
	WEIGHT	KG	130	150	190
	OIL REQ.	LTR/MIN	20-30-40	30-40	40
	PRESSURE	BAR	170-220	170-220	170-220
	TRANSMISSION		DIRECT	DIRECT	DIRECT
	CUT WIDTH	MM	700	900	1050