

LS3/4 REVERSIBLE FLAIL MOWER



Y Blade 6cm Ø



Hammer 8 cm Ø



Standard Rotor


- Protective chain on both sides
- Anti-cavitation/flow control: a system that stops any spike in pressure/sudden stoppage from damaging the excavator/motor
- No drain line required



FS rotor 12cm Ø



FR rotor 12cm Ø

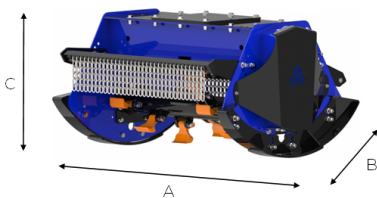

	TONS	2.5-4	5-8	6-8	
	MOD.	LS3 600R	LS4 800R	LS4 800 FR/FS	
	ALT.	TTE 70R	TTE 90R	TTE 90 RF	
	A. MM	850	1050	1050	
	B. MM	800	800	800	
	C. MM	600	600	600	
	WEIGHT	KG	180	260	300/330
	OIL REQ.	LTR/MIN	20-30	40-50-60	50-60 80-90
	PRESSURE	BAR	170-220	170-220	200-220
	TRANSMISSION		BELT	BELT	BELT
	CUT WIDTH	MM	700	900	900