

# LS4 FLAIL MOWER



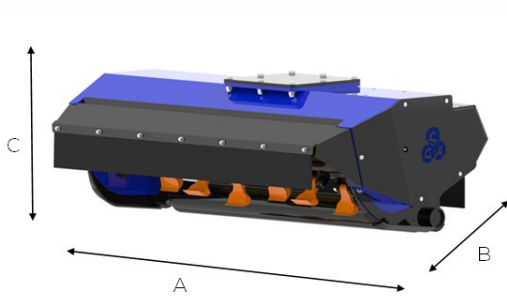
Y Blade  $\varnothing$  6 cm









Hammer  $\varnothing$  8 cm

The LS4 range is suitable for cutting grass, brambles and hedges up to 8cm in diameter. Supplied with protective rubber guard, anti-cavitation/flow control: a system that stops any spike in pressure/sudden stoppage from damaging the excavator/motor, adjustable rear roller with 3 cutting positions and a choice of either Y or hammer blades.

No drain line required.



	TONS	5-8	6-8	
	MOD.	LS41000	LS41200	
	ALT.	TTE105P	TTE125P	
A.	MM	1250	1450	
B.	MM	750	750	
C.	MM	500	500	
	WEIGHT	KG	220	250
	OIL REQ.	LTR/MIN	60-70-80	60-70-80
	PRESSURE	BAR	200-220	200-220
	TRANSMISSION		DIRECT	DIRECT
	CUT WIDTH	MM	1050	1250