


LS5 REVERSIBLE FLAIL MOWER



- Protective chain on both sides
- Anti-cavitation/flow control: a system that stops any spike in pressure/sudden stoppage from damaging the excavator/motor

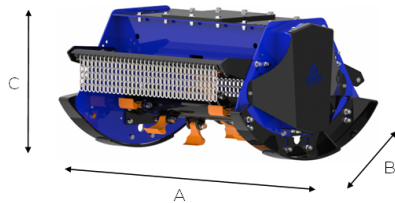

	TONS	6-12	6-12	6-12	
	MOD.	LS5 1000R	LS5 1000 FR/FS	LS5 1000 FIXED	
	ALT.	TTE 105 R	TTE 105 RF	TTE 105 RF FIX T.	
A.	MM	1250	1250	1250	
B.	MM	800	800	800	
C.	MM	600	600	600	
	WEIGHT	KG	310	360/400	490
	OIL REQ.	LTR/MIN	40-50-60 80-90	50-60 80-90	50-60 80-90
	PRESSURE	BAR	200-220	200-220	200-220
	TRANSMISSION		BELT	BELT	BELT
	CUT WIDTH	MM	1050	1050	1050