


LS6 1000 REVERSIBLE FLAIL




- Protective chain on both sides
- Anti-cavitation/flow control: a system that stops any spike in pressure/sudden stoppage from damaging the excavator/motor
- No drain line required
- Piston motor option

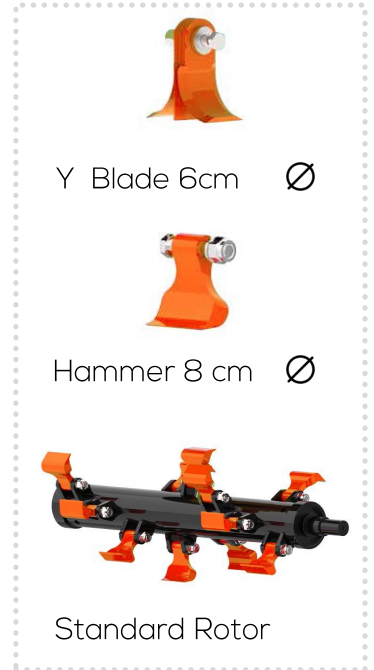

Fixed tooth 25cm Ø



FR rotor 12cm Ø

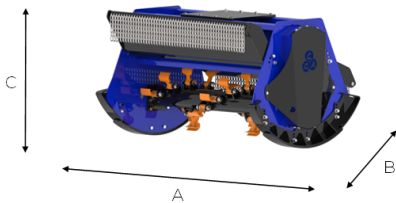

	TONS	8-16	8-16	10-16	
	MOD.	LS6 1000	LS6 1000F	LS6 1000 FIXED	
	ALT.	TTE 105 PR	TTE 105 PRF	TTE 105 PRF FIXT	
A.	MM	1250	1250	1250	
B.	MM	950	950	950	
C.	MM	850	850	850	
	WEIGHT	KG	480	535	685
	OIL REQ.	LTR/MIN	80-100	80-100	80-100
	PRESSURE	BAR	200-220	200-220	200-220
	TRANSMISSION		BELT	BELT	BELT
	CUT WIDTH	MM	1050	1050	1050