





LS6 1000 / T13 105 REV

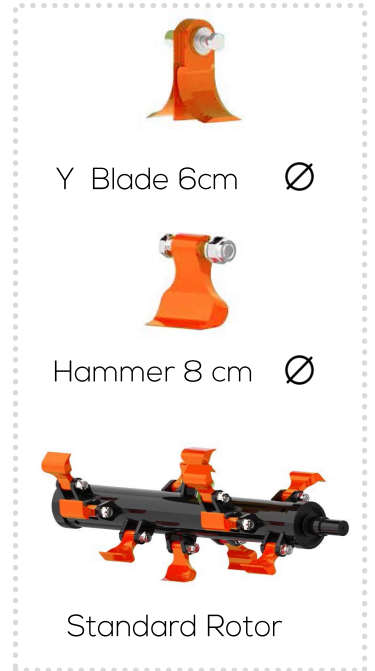

- Protective chain on both sides
- Anti-cavitation/flow control: a system that stops any spike in pressure/sudden stoppage from damaging the excavator/motor
- No drain line required
- Piston motor option

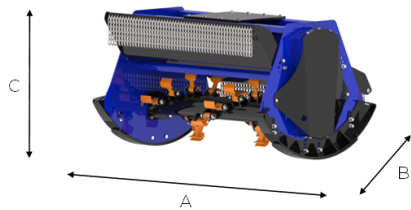

TONS	8-16	10-16	10-16
MOD.	LS6 1000	LS6 1000F	LS6 1000 FIXED
ALT.	T13 MZ105	T13 FS105	T13 DF105
A. MM	1250	1250	1250
B. MM	950	950	950
C. MM	850	850	850
WEIGHT KG	480	535	685
OIL REQ. LTR/MIN	80-100	80-100	80-100
PRESSURE BAR	200-220	200-220	200-220
TRANSMISSION	BELT	BELT	BELT
CUT WIDTH MM	1050	1050	1050