

LS6 1300 REVERSIBLE FLAIL



Y Blade 6cm Ø



Hammer 8 cm Ø



Standard Rotor


- Protective chain on both sides
- Anti-cavitation/flow control: a system that stops any spike in pressure/sudden stoppage from damaging the excavator/motor
- No drain line required
- Piston motor option



Fixed tooth 25cm Ø



FR rotor 12cm Ø

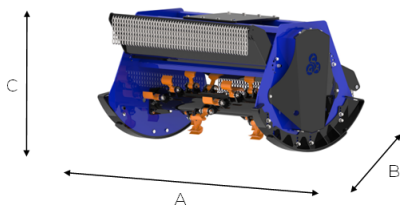

	TONS	8-16	8-16	10-16	
	MOD.	LS6 1300	LS6 1300F	LS6 1300 FIXED	
	ALT.	TTE 130 PR	TTE 130 PRF	TTE 130 PRF FIX	
A.	MM	1450	1450	1450	
B.	MM	950	950	950	
C.	MM	850	850	850	
	WEIGHT	KG	540	595	745
	OIL REQ.	LTR/MIN	80-100	80-100	80-100
	PRESSURE	BAR	200-220	200-220	200-220
	TRANSMISSION		BELT	BELT	BELT
	CUT WIDTH	MM	1300	1300	1300