

# LS7 1300 REVERSIBLE FLAIL



Y Blade 6cm Ø



Hammer 8 cm Ø



Standard Rotor










FR rotor 25cm Ø

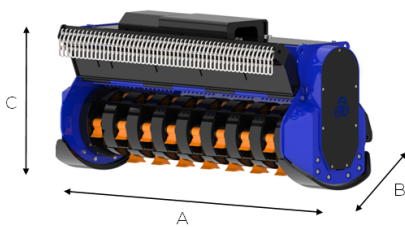

Fixed tooth 25cm Ø

- Protective chain on both sides
- Anti-cavitation/flow control: a system that stops any spike in pressure/sudden stoppage from damaging the excavator/motor
- Piston motor



	TONS	10-25	12-25	12-25	
	MOD.	LS71300	LS71300F	LS71300 FIXED	
A.	MM	1600	1600	1600	
B.	MM	800	800	800	
C.	MM	850	850	850	
	WEIGHT	KG	650	920	950
	OIL REQ.	LTR/MIN	90-180	90-180	90-180
	PRESSURE	BAR	200-250	200-250	200-250
	TRANSMISSION		BELT	BELT	BELT
	CUT WIDTH	MM	1300	1300	1300