

LS7 1600 REVERSIBLE FLAIL



Y Blade 6cm Ø



Hammer 8 cm Ø



Standard Rotor


- Protective chain on both sides
- Anti-cavitation/flow control: a system that stops any spike in pressure/sudden stoppage from damaging the excavator/motor
- Piston motor



Fixed tooth 25cm Ø



FR rotor 25cm Ø

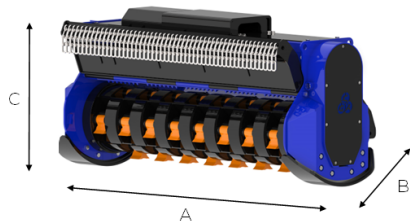

	TONS	12-25	15-25	16-25	
	MOD.	LS71600	LS71600F	LS71600 FIXED	
A.	MM	1900	1900	1900	
B.	MM	800	800	800	
C.	MM	850	850	850	
	WEIGHT	KG	750	1020	1050
	OIL REQ.	LTR/MIN	90-180	90-180	90-180
	PRESSURE	BAR	200-250	200-250	200-250
	TRANSMISSION		BELT	BELT	BELT
	CUT WIDTH	MM	1600	1600	1600