T13 US MULCHER





DFD ROTOR



HF22 20 cm ⌀

- **DFD Forestry Rotor**: Helical rotor with double-edge fixed teeth and bite limiter for controlled feed and consistent rotor speed. HF22 teeth handle material up to 20 cm.
- **Built for Bigger Machines**: 1300 mm cut for 10 to 16 ton excavators, with a double-case body, side skids and double-row adjustable roller bearings.
- **Open Front Design**: Front hood delete gives unrestricted rotor access into heavy material, with a mechanically adjustable rear hood.
- **Piston Motor as Standard**: Piston motor with 4-belt HTD transmission (case drain required). Automatic variable displacement motor available: 40/60 cc (90-130 L/min) for 10-13 ton, 65/80 cc (140-170 L/min) for 13-16 ton.
- **Options**: Bracket with pins and 2.5 m hose kit for piston motor.

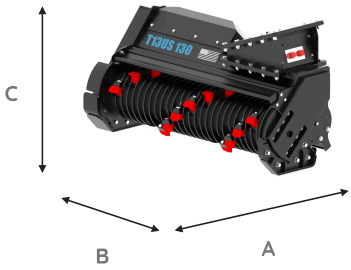

	TONS		10-16
	MOD.		T13 US
A.	MM		1500
B.	MM		700
C.	MM		800
kg	WEIGHT	KG	650
	OIL REQ.	LTR/MIN	100
	PRESSURE	BAR	200-300
	TRANSMISSION		BELT
	CUT WIDTH	MM	1300