T9 US MULCHER

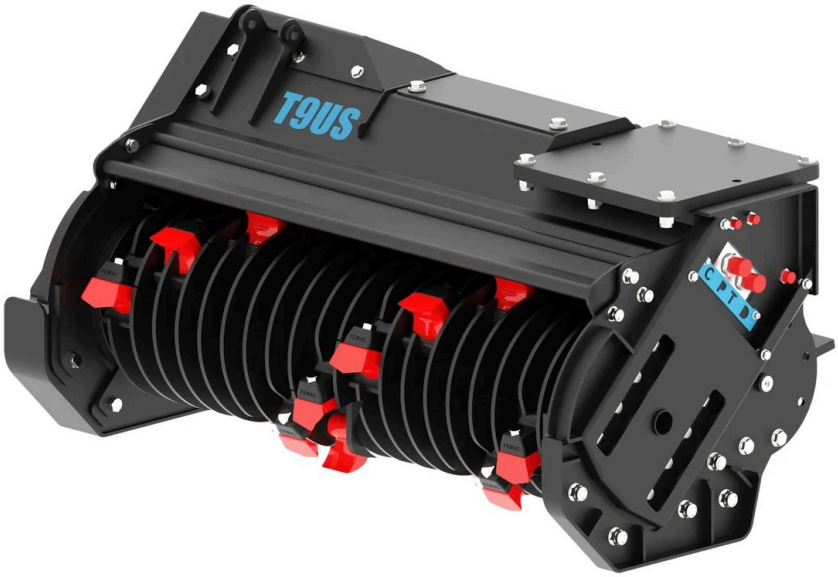



DF ROTOR



HF14 25 cm ⌀



HF15 20 cm ⌀



DFD ROTOR



HF22 20 cm ⌀

- **Choice of Rotors**: DF forestry rotor with fixed tungsten carbide teeth or hardened blades (HF14 up to 25 cm, HF15 up to 20 cm), or DFD rotor with double-edge fixed teeth and bite limiter (HF22 up to 20 cm).
- **Open Front, Adjustable Rear**: Front hood delete leaves the rotor fully exposed for aggressive clearing, with a mechanically adjustable rear hood to control discharge.
- **Built for Forestry**: Double-case body, Hardox-reinforced side skids, labyrinth rotor seals and double-row adjustable roller bearings.
- **Belt Drive & Motor Options**: Toothed V-belt transmission with cast iron gear motor (22, 27, 34, 43 or 51 cc) and valve block. Variable displacement piston motor available for 8-12 ton machines.
- **Options**: Bracket with pins, quick hitch, 2 m hose kit, self-levelling support and hydraulic rotation.



	TONS		5-12	6-12	6-12	5-12	6-12	6-12
	MOD.		T9 US DF70	T9 US DF90	T9 US DF110	T9 US DFD70	T9 US DFD90	T9 US DFD110
A.	MM		850	1050	1240	850	1050	1240
B.	MM		650	650	650	650	650	650
C.	MM		640	640	640	640	640	640
WEIGHT	KG		315	365	430	345	400	470
OIL REQ.	LTR/MIN		40-50-60-80-100	50-60-80-100	50-60-80-100	40-50-60-80-100	50-60-80-100	50-60-80-100
PRESSURE	BAR		200-220	200-220	200-220	200-220	200-220	200-220
TRANSMISSION			BELT	BELT	BELT	BELT	BELT	BELT
CUT WIDTH	MM		700	900	1100	700	900	1100