ONE WHEEL TOOTHED

Ideal for compaction work in narrow trenches.

Allows the wheel to reach deep into the trench.

Particularly suitable for laying fibre optic cables and underground utilities.







SINGLE TOOTHED WHEEL with directly welded TOK adapter.





Thanks to the machine couplings, the ONE WHEEL can be mounted directly onto the operating machine without requiring a vibration power unit.

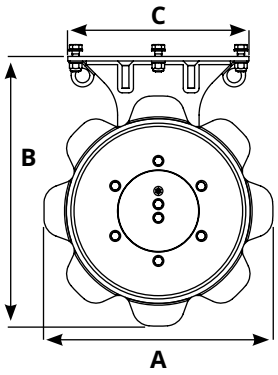

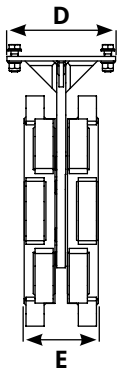

Model	#	A mm	B mm	C mm	D mm	E mm	Kg.	Model. PLURY
ONE WHEEL TO 160	A	505	595	400	240	160	105	W1 14
ONE WHEEL TO 160	B	505	595	400	240	160	105	W1 25
ONE WHEEL TO 160	C	610	690	460	300	160	135	W1 45
ONE WHEEL TO 220	D+E+F+G	750	860	600	400	220	215	W1 60 - W1 90 W2 62 - W2 92
ONE WHEEL TO 270	D+E+F+G	750	860	600	400	270	220	W1 60 - W1 90 W2 62 - W2 92
ONE WHEEL TO 220	H+I+L	850	990	820	400	220	260	W2 125 - W2 185 - W2 220
ONE WHEEL TO 270	H+I+L	850	990	820	400	270	275	W2 125 - W2 185 - W2 220

The data provided should be considered indicative and should be compared with the capacity of the operating machine on which the equipment is used

HOME