PLATE 2P - COMPACTION PLATE WITH 2 BENDS

Designed to compact all types of surfaces, such as trenches, soils and slopes.

Ensures a compact, uniform and stable base, built to last over time.

Capable of compacting even in very difficult positions.





PLATE with directly welded TOK ADAPTER



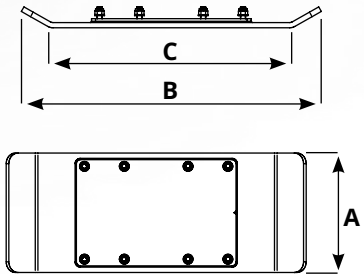

Model	#	A mm	B mm	C mm	Kg.	compaction kg cm2	Model. PLURY
PLATE 2P 300	A	300	620	500	28	1,05	W1 14
PLATE 2P 400	A	400	620	500	35	0,79	W1 14
PLATE 2P 300	B	300	750	630	34	1,43	W1 25
PLATE 2P 400	B	400	750	630	43	1,08	W1 25
PLATE 2P 350	C	350	820	700	48	1,99	W1 45
PLATE 2P 400	C	400	820	700	53	1,74	W1 45
PLATE 2P 500	C	500	820	700	63	1,40	W1 45
PLATE 2P 450	D + F	450	1130	890	110	1,68	W1 60 - W2 62
PLATE 2P 500	D + F	500	1130	890	120	1,52	W1 60 - W2 62
PLATE 2P 600	D + F	600	1130	890	138	1,27	W1 60 - W2 62
PLATE 2P 700	D + F	700	1130	890	156	1,09	W1 60 - W2 62
PLATE 2P 500	E + G	500	1230	990	128	2,02	W1 90 - W2 92
PLATE 2P 600	E + G	600	1230	990	148	1,69	W1 90 - W2 92
PLATE 2P 700	E + G	700	1230	990	167	1,45	W1 90 - W2 92
PLATE 2P 500	H + I + L	500	1500	1270	175	3,68	W2 125 - W2 185 - W2 220
PLATE 2P 600	H + I + L	600	1500	1270	199	3,07	W2 125 - W2 185 - W2 220
PLATE 2P 700	H + I + L	700	1500	1270	224	2,64	W2 125 - W2 185 - W2 220

The data provided should be considered indicative and should be compared with the capacity of the operating machine on which the equipment is used

HOME