# STORM - WHEEL COMPACTOR

Ideal for compaction work.

Ideal for compacting the bottom and backfill material inside trenches.

The attachment ensures a solid, uniform and long-lasting base.









STORM with TOK adapter welded directly onto the attachment.





By means of the MACHINE COUPLINGS the STORM can be mounted directly on the machine without drive.

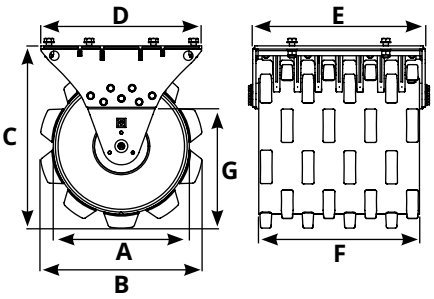


| Cod. | Model | # | B mm | A mm | C mm | D mm | E mm | F mm | G mm | Kg. | Model. PLURY |
|---|---|---|---|---|---|---|---|---|---|---|---|
| HRC0101001 | **STORM 40 L300** | B | 505 | 400 | 595 | 360 | 360 | 300 | 341 | 140 | W1 25 |
| HRC0101003 | **STORM 40 L400** | B | 505 | 400 | 595 | 280 | 460 | 400 | 341 | 165 | W1 25 |
| HRC0101004 | **STORM 40 L500** | B | 505 | 400 | 595 | 280 | 560 | 500 | 341 | 191 | W1 25 |
| HRC0101001 | **STORM 40 L300** | C | 505 | 400 | 595 | 360 | 360 | 300 | 341 | 140 | W1 45 |
| HRC0101003 | **STORM 40 L400** | C | 505 | 400 | 595 | 280 | 460 | 400 | 341 | 165 | W1 45 |
| HRC0101004 | **STORM 40 L500** | C | 505 | 400 | 595 | 280 | 560 | 500 | 341 | 191 | W1 45 |
| HRC0201003 | **STORM 50 L400** | D + F | 615 | 500 | 700 | 430 | 470 | 400 | 393 | 235 | W1 60 - W2 62 |
| HRC0201004 | **STORM 50 L500** | D + F | 615 | 500 | 700 | 430 | 570 | 500 | 393 | 272 | W1 60 - W2 62 |
| HRC0201001 | **STORM 50 L600** | D + F | 615 | 500 | 700 | 430 | 670 | 600 | 393 | 302 | W1 60 - W2 62 |
| HRC0301003 | **STORM 65 L400** | E+G H+I+L | 790 | 650 | 895 | 540 | 485 | 400 | 527 | 363 | W1 90 - W2 92<br>W2 125 - W2 185 - W2 220 |
| HRC0301002 | **STORM 65 L600** | E+G H+I+L | 790 | 650 | 895 | 540 | 685 | 600 | 527 | 458 | W1 90 - W2 92<br>W2 125 - W2 185 - W2 220 |
| HRC0301001 | **STORM 65 L800** | E+G H+I+L | 790 | 650 | 895 | 540 | 885 | 800 | 527 | 555 | W1 90 - W2 92<br>W2 125 - W2 185 - W2 220 |
| HRC0401003 | **STORM 90 L600** | / | 1045 | 900 | 1170 | 600 | 700 | 600 | 728 | 662 | For direct mounting on excavator |
| HRC0401002 | **STORM 90 L800** | / | 1045 | 900 | 1170 | 600 | 900 | 800 | 728 | 775 | For direct mounting on excavator |
| HRC0401001 | **STORM 90 L1000** | / | 1045 | 900 | 1170 | 600 | 1100 | 1000 | 728 | 895 | For direct mounting on excavator |



*The data provided should be considered indicative and should be compared with the capacity of the operating machine on which the equipment is used*